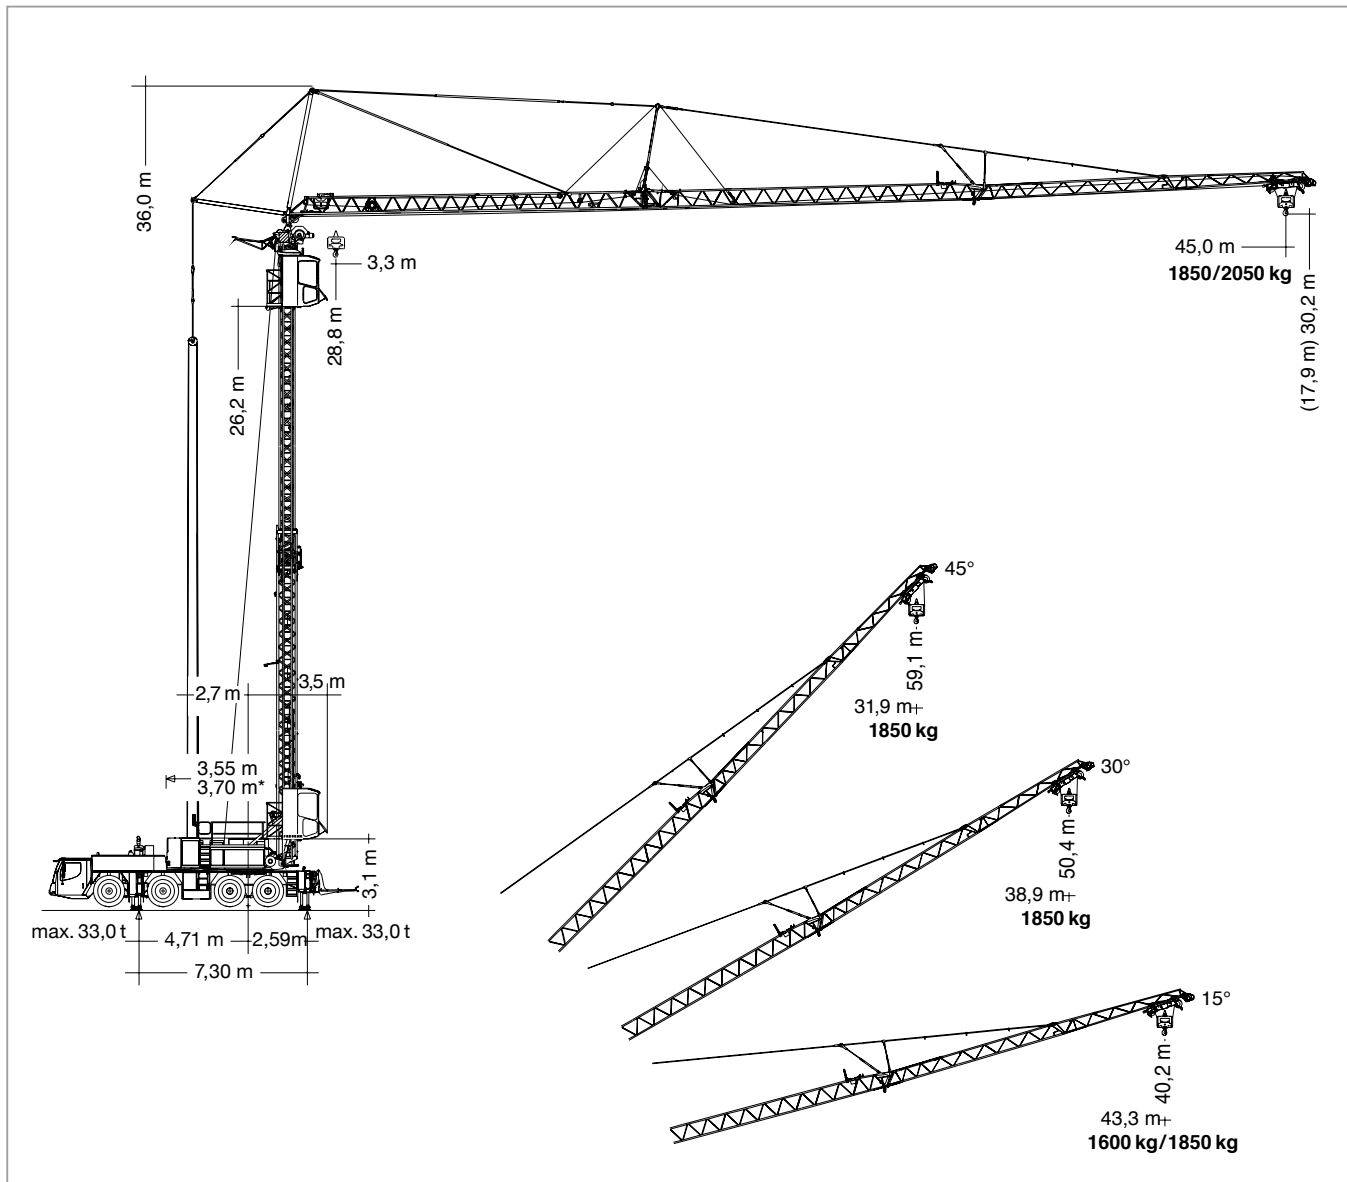


















* mit 2.0 t Zusatzballast














 7,30 m x 7,00 m	m	 m/kg																		
			12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	44,0	45,0
 max. 6,5 Bft (14 m/sec.)	45,0	3,3-11,0 8000	7370	6360	5580	4960	4460	4050	3700	3400	3140	2920	2720	2540	2390	2250	2120	2000	1900	1850
 max. 8,0 Bft (20 m/sec.)	45,0	3,3-10,0 8000	6770	5850	5140	4570	4110	3730	3410	3130	2900	2690	2510	2340	2200	2070	1950	1840	1750	1700






 7,30 m x 5,75 m	m	 m/kg																		
			12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	44,0	45,0
 max. 6,5 Bft (14 m/sec.)	45,0	3,3-10,0° 8000	6480	5430	4660	4070	3610	3230	2920	2660	2430	2240	2070	1920	1790	1680	1570	1480	1390	1350
 max. 8,0 Bft (20 m/sec.)	45,0	3,3-8,5° 8000	5530	4690	4060	3560	3170	2850	2580	2350	2160	1990	1840	1710	1590	1490	1400	1310	1240	1200

AUSLEGERSTEILSTELLUNG

 7,30 m x 7,00 m	m		 15°				 45°			
			m	kg	m	kg				
 max. 6,5 Bft (14 m/sec.)	45,0		3,2-38,0 38,0-43,3	1850 1850-1600	2,7-31,9	1850				
 max. 8,0 Bft (20 m/sec.)	45,0		3,2-32,0 32,0-43,3	1850 1850-1300	2,7-28,0 28,0-31,9	1850 1850-1600				






 7,30 m x 7,00 m	m		 30°															
			m/kg															
 max. 6,5 Bft (14 m/sec.)	45,0	3,0-10,0 6000	6000	6000	5260	4690	4220	3830	3500	3220	2980	2770	2580	2410	2260	2130	2010	1850
 max. 8,0 Bft (20 m/sec.)	45,0	3,0-8,0° 6000	6000	5200	4580	4080	3670	3340	3050	2800	2590	2410	2240	2100	1970	1850	1740	1600






 7,30 m x 5,75 m	m		 15°				 45°			
			m	kg	m	kg				
 max. 6,5 Bft (14 m/sec.)	45,0		3,2-32,0 32,0-43,3	1850 1850-1300	2,7-30,0 30,0-31,9	1850 1850-1700				
 max. 8,0 Bft (20 m/sec.)	45,0		3,2-26,0 26,0-43,3	1850 1850-1000	2,7-20,0 20,0-31,9	1850 1850-1000				

 7,30 m x 5,75 m	m		 30°															
			m/kg															
 max. 6,5 Bft (14 m/sec.)	45,0	3,0-8,0° 6000	6000	5200	4580	4080	3670	3340	3050	2800	2590	2410	2240	2100	1970	1850	1740	1600
 max. 8,0 Bft (20 m/sec.)	45,0	3,0-8,0° 6000	6000	4940	4200	3630	3190	2840	2550	2310	2100	1930	1770	1640	1520	1420	1320	1200














200 kg Gewicht für Anschlagmittel müssen zur Last addiert werden.







 7,30 m x 7,00 m	m	 m/kg	 m/kg																	
			12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	44,0	45,0
 max. 6,5 Bft (14 m/sec.)	45,0	3,3-12,0 8000	8000	6900	6070	5410	4870	4420	4050	3730	3450	3210	2990	2800	2630	2480	2340	2220	2100	2050
 max. 8,0 Bft (20 m/sec.)	45,0	3,3-11,0 8000	7370	6360	5580	4960	4460	4050	3700	3400	3140	2920	2720	2540	2390	2250	2120	2000	1900	1850






 7,30 m x 5,75 m	m	 m/kg	 m/kg																	
			12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,0	40,0	42,0	44,0	45,0
 max. 6,5 Bft (14 m/sec.)	45,0	3,3-10,5* 8000	6930	5870	5080	4470	3980	3580	3250	2970	2730	2520	2340	2180	2030	1910	1790	1690	1590	1550
 max. 8,0 Bft (20 m/sec.)	45,0	3,3-9,5* 8000	6310	5380	4680	4130	3690	3320	3020	2760	2540	2350	2180	2030	1900	1780	1680	1580	1490	1450

AUSLEGERSTEILSTELLUNG

 7,30 m x 7,00 m	m	 m/kg	 15°				 45°			
			m	kg	m	kg				
 max. 6,5 Bft (14 m/sec.)	45,0		3,2-40,0 40,0-43,3	1850 1850-1700	2,7-31,9	1850				
 max. 8,0 Bft (20 m/sec.)	45,0		3,2-35,0 35,0-43,3	1850 1850-1400	2,7-31,9	1850				

 7,30 m x 7,00 m	m	 m/kg	 30°															
			8,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,9
 max. 6,5 Bft (14 m/sec.)	45,0	3,0-11,0 6000	6000	6000	5650	5050	4560	4150	3810	3510	3250	3030	2830	2650	2490	2350	2220	2050
 max. 8,0 Bft (20 m/sec.)	45,0	3,0-9,0* 6000	6000	5620	4970	4450	4020	3660	3360	3100	2870	2670	2490	2340	2200	2070	1950	1800

 7,30 m x 5,75 m	m	 m/kg	 15°				 45°			
			m	kg	m	kg				
 max. 6,5 Bft (14 m/sec.)	45,0		3,2-34,0 32,0-43,3	1850 1850-1450	2,7-31,9	1850				
 max. 8,0 Bft (20 m/sec.)	45,0		3,2-29,0 29,0-43,3	1850 1850-1150	2,7-24,0 24,0-31,9	1850 1850-1350				

 7,30 m x 5,75 m	m	 m/kg	 30°															
			8,0	10,0	12,0	14,0	16,0	18,0	20,0	22,0	24,0	26,0	28,0	30,0	32,0	34,0	36,0	38,9
 max. 6,5 Bft (14 m/sec.)	45,0	3,0-11,0* 6000	6000	6000	5580	4880	4320	3880	3510	3200	2930	2700	2500	2330	2180	2040	1910	1750
 max. 8,0 Bft (20 m/sec.)	45,0	3,0-9,0* 6000	6000	5480	4650	4030	3540	3150	2830	2570	2340	2150	1980	1830	1700	1590	1490	1350



200 kg Gewicht für Anschlagmittel müssen zur Last addiert werden.